


**Lambda vs. AFR value comparison table**

Tatech UI	Lambda	AFR
600	0.60	8.82
610	0.61	8.97
620	0.62	9.11
630	0.63	9.26
640	0.64	9.41
650	0.65	9.56
660	0.66	9.70
670	0.67	9.85
680	0.68	10.00
690	0.69	10.14
700	0.70	10.29
710	0.71	10.44
720	0.72	10.58
730	0.73	10.73
740	0.74	10.88
750	0.75	11.03
760	0.76	11.17
770	0.77	11.32
780	0.78	11.47
790	0.79	11.61
800	0.80	11.76
810	0.81	11.91
820	0.82	12.05
830	0.83	12.20
840	0.84	12.35
<b>850</b>	<b>0.85</b>	<b>12.50</b>
860	0.86	12.64
870	0.87	12.79
880	0.88	12.94
890	0.89	13.08
900	0.90	13.23
910	0.91	13.38
920	0.92	13.52
930	0.93	13.67
940	0.94	13.82
950	0.95	13.97
960	0.96	14.11
970	0.97	14.26
980	0.98	14.41
990	0.99	14.55
<b>1000</b>	<b>1.00</b>	<b>14.70</b>
1010	1.01	14.85
1020	1.02	14.99
<b>1030</b>	<b>1.03</b>	<b>15.14</b>
1040	1.04	15.29
1050	1.05	15.44
1060	1.06	15.58
1070	1.07	15.73
1080	1.08	15.88
1090	1.09	16.02
1100	1.10	16.17
1110	1.11	16.32
1120	1.12	16.46
1130	1.13	16.61
1140	1.14	16.76
1140	1.15	16.91
1140	1.16	17.05
1140	1.17	17.20
1140	1.18	17.35
1140	1.19	17.49
1140	1.20	17.64

**Lambda to AFR:**  
**Lambda x 14.7**

Please make sure that the correct lambda display filter is selected from fuel settings!

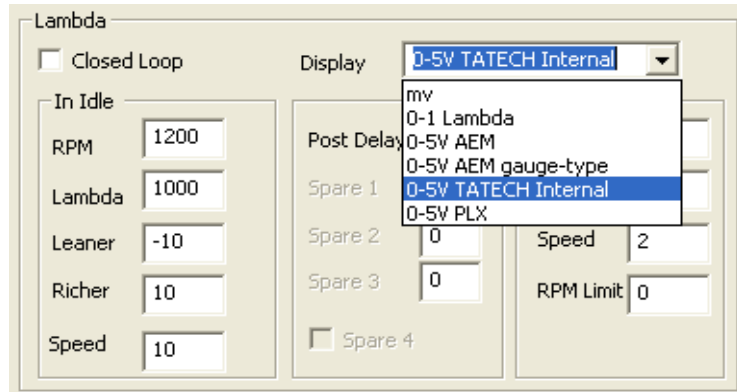

Example: Tatech internal wbo2 selected